

6

5


7

D

С

A

8

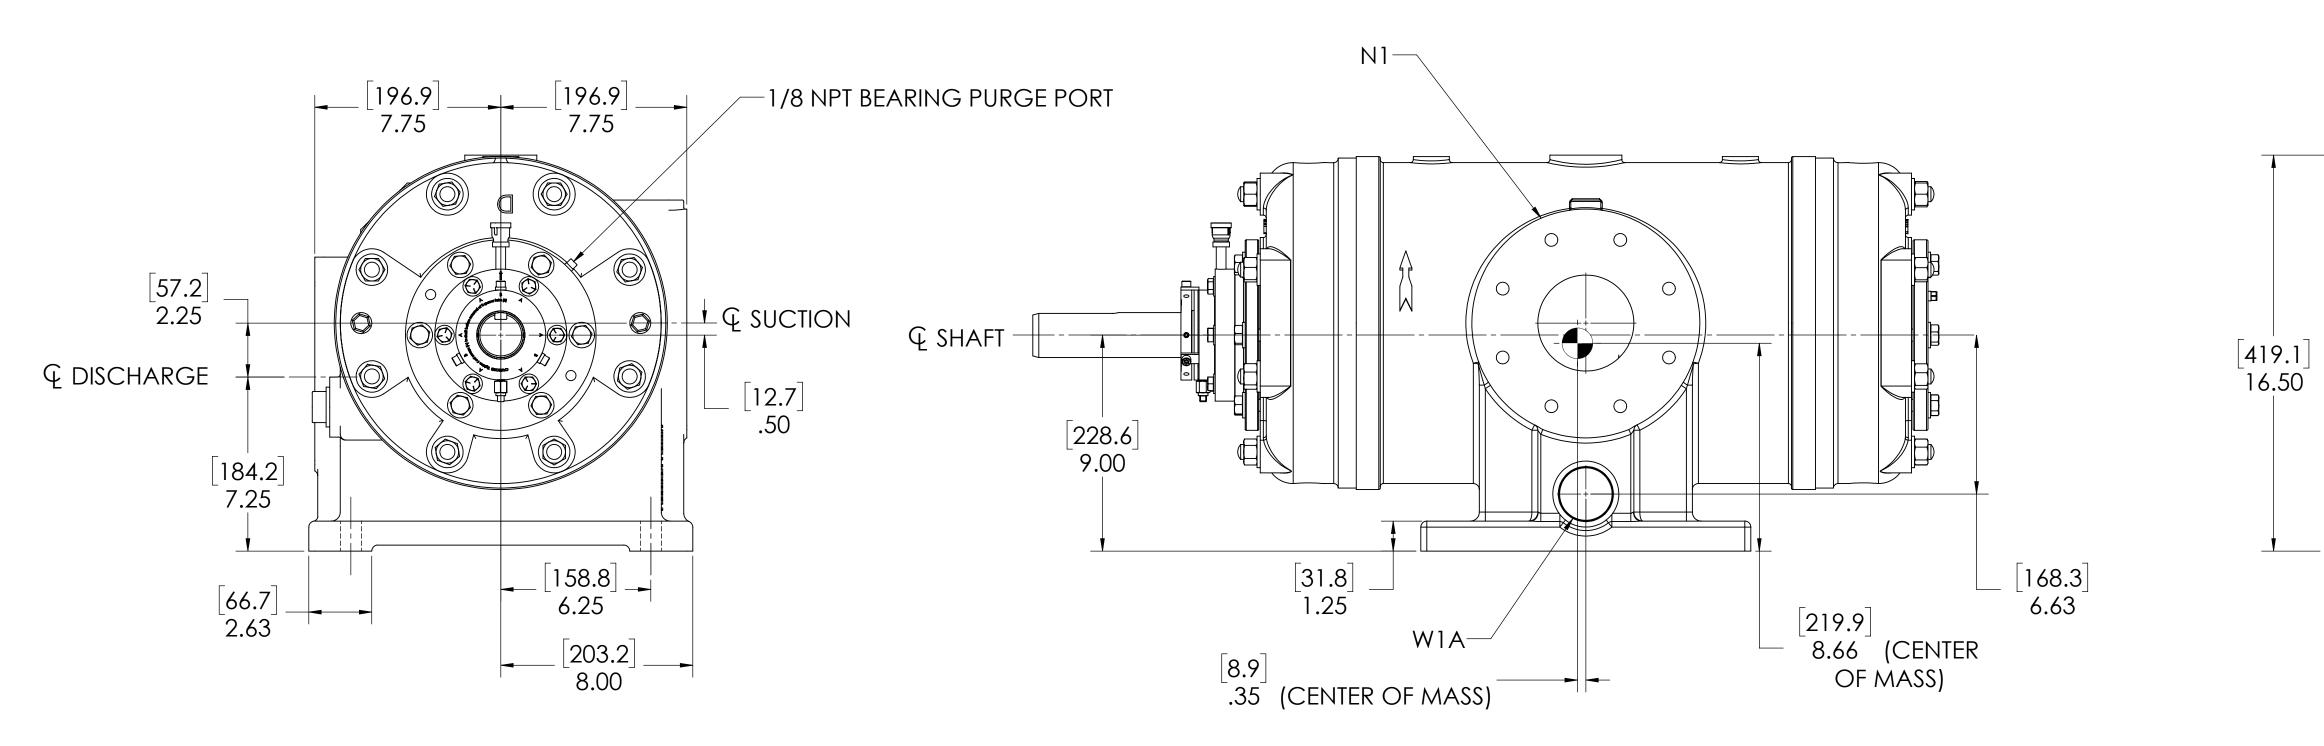

D3—

NOTE 5-


6

NOTES:

8

- 1. - CENTER OF MASS DIMENSIONS ARE APPROXIMATE
- 2. EITHER WATER INLET MAY BE USED, DEPENDING UPON SYSTEM NEEDS
- 3. WEIGHT IS APPROXIMATE
- 4. THIS DRAWING IS DUAL DIMENSION. DIMENSIONS WITHOUT BRACKETS ARE IN INCHES, DIMENSIONS IN [BRACKETS] ARE IN MILLIMETERS.
- 5. REMOVE (3) RED SEAL LOCKING TABS BEFORE OPERATION. RETAIN TABS AND SCREWS FOR SERVICE (TABS MUST BE INSTALLED BEFORE SEAL REMOVAL).

7

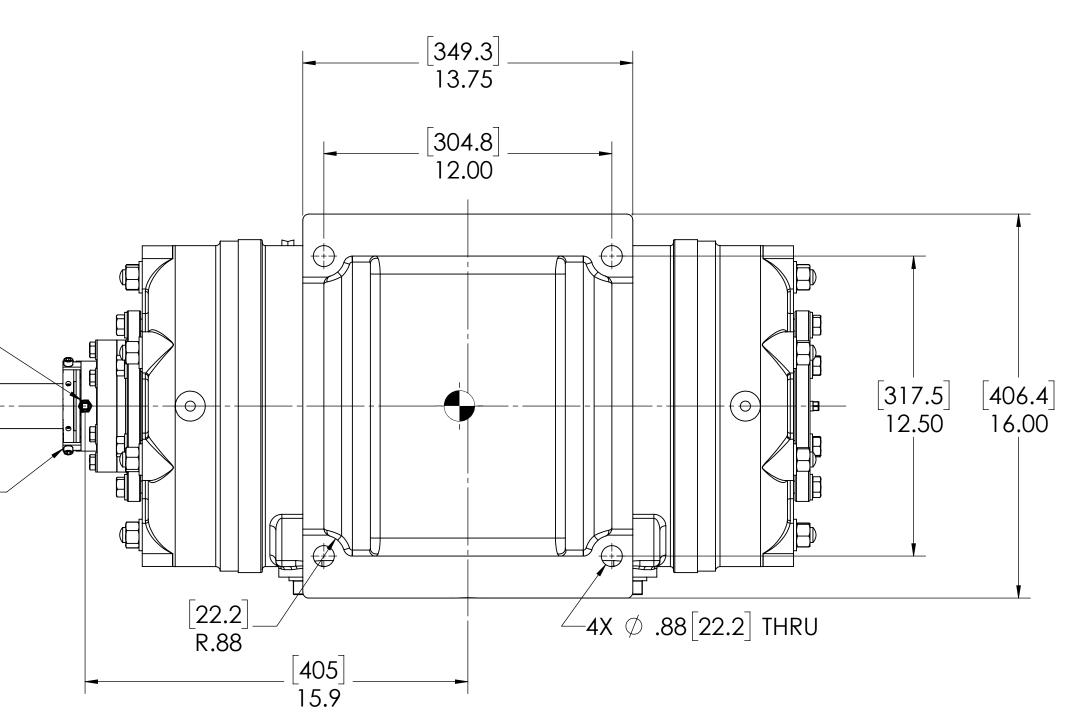

5


4


1/2-13 UNC - 2B  $\overline{\vee}$  .75[19.1] THIS IS A LIFTING HOLE FOR CYLINDER HEAD (MAINTENANCE) ONLY. DO NOT USE THIS HOLE FOR LIFTING COMPRESSOR!

3

4

[355.6] - 14.00 CLEARANCE REQUIRED TO REMOVE ROTOR BLADES

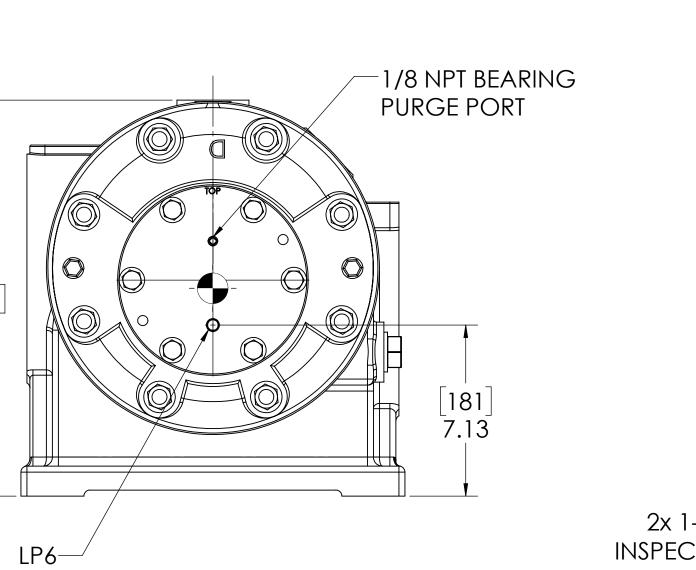


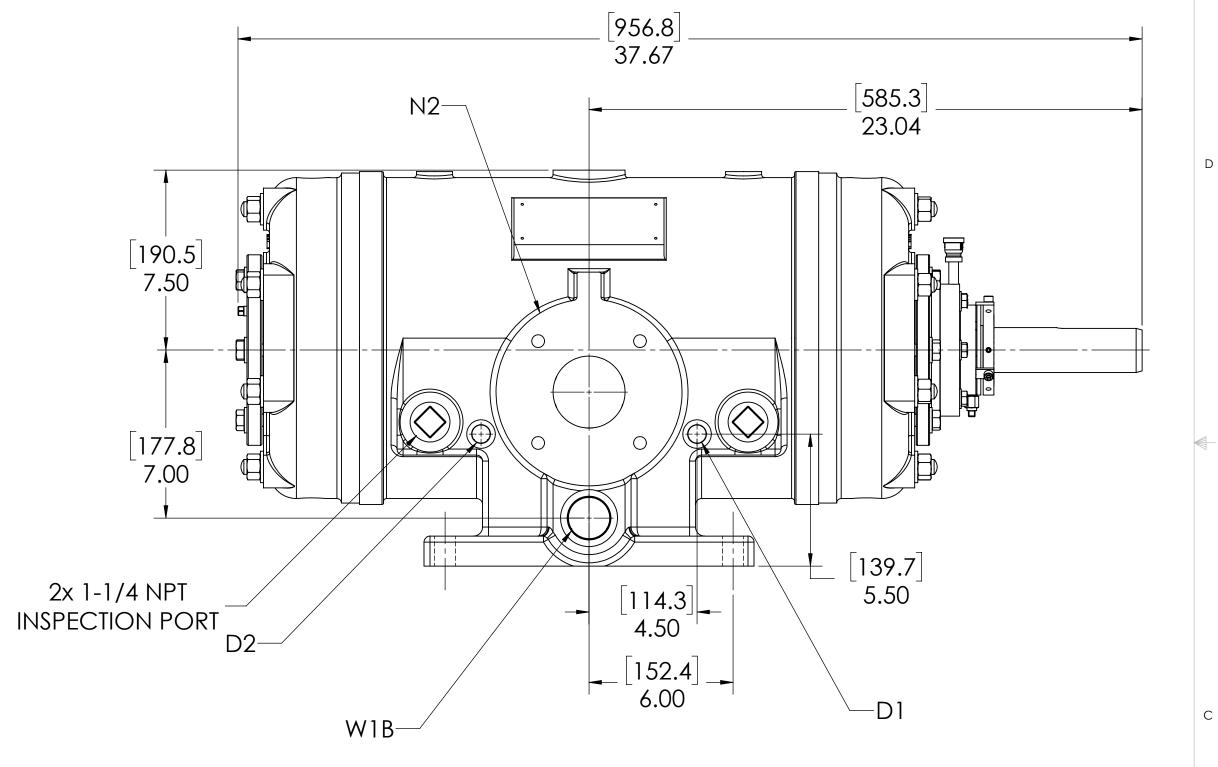

	NOZZLE CONNECTIONS	<b>BOLT HOLE SIZE</b>		
N1	4" GAS SUCTION FLANGE (ANSI CLASS 150 FLAT FACE)	8 x 5/8-11⊽1.00		
N2	3'' GAS DISCHARGE FLANGE (ANSI CLASS 150 FLAT FACE)	4 x 5/8-11⊽1.00		
W1A	2 NPT(F) WATER INLET (SEE NOTE 2)	N/A		
W1B	1-1/2 NPT(F) WATER INLET (SEE NOTE 2)	N/A		
W2	1-1/4 NPT(F) WATER OUTLET	N/A		
D1	1/2 NPT (F) DRAIN HOLE	N/A		
D2	1/2 NPT (F) DRAIN HOLE	N/A		
D3	1/8 NPT (F) SEAL WEEPAGE DRAIN	N/A		

3

2

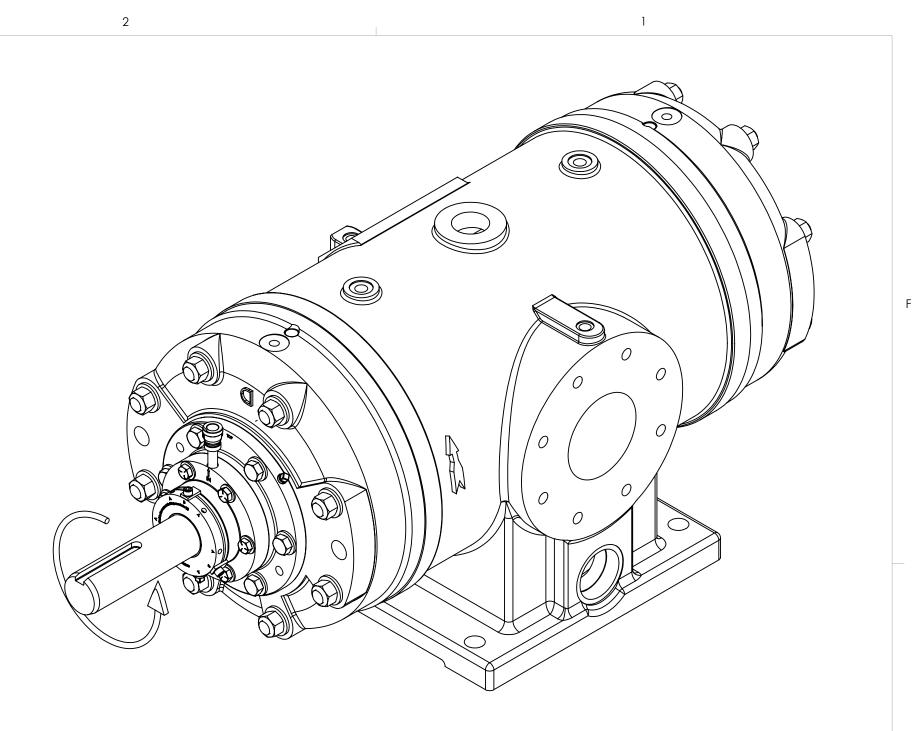

				CONNE	•		
(REFER TO MAN	<u>ANV</u>	LFC	<u>DR Fl</u>	JRTHER IN	<b>VFORMATI</b>	ON)	
DESCRIPTION		THREAD SIZE			QTY	QTY	
LUBE QUILL(LG	2)	1/4 NPT(F)		1	1		
LUBE POINTS(LF	'x)	1/4 NPT(F)		6			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME TRF	DATE		Ro-Flo		
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH±.5 DEG	DRAWN CHECKED ENG APPR.	TRF TRF	11/13/2023 11/13/2023	IIILE:	Ro-Flo		
DIMENSIONS ARE IN INCHES TOLERANCES:	CHECKED ENG APPR. PROPRIETAR THE INFOR	TRF TRF TRF Y AND CO MATION C THIS	11/13/2023 11/13/2023 11/13/2023	GENERAL	<b>RO-FIO</b> ARRANGEMED, CCW, SC	ENT,	

1:4 800 LBS 1 OF 1

В